



USB 3.0 Full HD Video Capture Device with Audio **User's Guide**











Congratulations for owning a gofanco product. Our products aim to meet all your connectivity needs wherever you go.

Have fun with our products!

Please read this manual carefully before first use.

If you need more information about our products, please visit www.gofanco.com.

For technical support, please email us at support@gofanco.com.

For drivers/manuals download, please go to http://www.gofanco.com/download.



1. Introduction

The PRO-CaptureHDaud USB 3.0 Full HD Video Capture Device with Audio provides a professional way to capture HDMI video signals. It adopts USB 3.0 interface, which can realize high-speed transmission. Users can capture Full HD (1080p60) video by this capture device. Besides, PRO-CaptureHDaud can capture and display original uncompressed HDMI video with more realistic color rendition. PRO-CaptureHDaud also uses large volume image buffer technology which effectively avoids the video tearing. The high sampling rate and high sampling accuracy assure images with high sharpness, rich details, and less color edges.

2. Features

- HDMI video and audio streams over USB 3.0
- Supports UVC1.0
- Supports video resolution up to 1080p 60Hz
- Supports analog audio input
- Auto-detection on video format to ensure plug-play operations
- Recording Video Format: H.264 (Software Compression)
- Works on multiple operating system platforms (Windows 7/8.1/10, Mac and Linux⁴OS)
- Compatible with most 3 party software such as OBS Studio and AMCap



- Supports USB 3.0 (MJPG/YUY2) and USB 2.0 (MJPG)
- Low Latency
- System Requirements (Recommended)
 - Windows® 7(SP1) / Windows 8.1 / Windows 10
 - PC: Intel® CoreTM i5-4440 3.10GHz + NVIDIA® GeForce® GTX 660 or higher
 - Laptop: Intel® Core i7-4810MQ + NVIDIA GeForce GTX 870M or higher
 - 4GB RAM or higher
 - Video quality is influenced by the system's capability and software settings.
 - 2. Please use the included USB 3.0 cable to protect the device and avoid compatibility issues.

3. Package Contents

- 1x PRO-CaptureHDaud
- 1x USB 3.0 A to A Cable (host to device)
- 1x User Manual




4. Specifications

Item		Description			
Role of usage		Video Capture Device			
Input Video bandwidth		150MHz			
Output Video bandwidth		Up to 350MBps (USB)			
Video support		Up to 1080p60			
Audio Input		HDMI Embedded Audio හ Stereo audio Input			
Audio Format		2CH 16bit PCM			
Recording Mode		Software Compression			
Recording Video Format		YUY2 (USB3.0), MJPG (USB2.0/3.0)			
ESD protection		Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge]			
PCB stack-up		6-layer board [impedance control — differential 100Ω; single 50Ω]			
Firmware update		Feasible via USB port			
Input		1x HDMI			
Output		1x USB+ 1x 3.5mm			
HDMI connector		Type A [19-pin female]			
USB connector		USB 3.0 Type A (SuperSpeed USB)			
Software compatibility (not complete list)		OBS Studio (Windows, Linux), AMCap (Windows), Potplayer (Windows), VLC (OS X, Linux), XSplit Boardcast (Windows), Skype (Windows, OS X), Zoom (Windows), Hangout (Windows), TeamViewer (Windows)			
OS Support		Windows 7 /8.1 /10, Mac and Linux OS			
Mechanical					
Housing		Metal enclosure			
Dimensions [L x D x H]	Model	73 x 50 x 20mm[2.9" x 2" x 0.8"]			
	Package	165 x 111 x 42mm [6.4" x 4.4" x 1.7"]			
	Carton	490 x 426 x 352mm [1'6" x 1'4" x 13.8"]			
Weight	Model	73g[2.6 oz]			
	Package	172g[6 oz]			
Power supply		Via USB			
Power consumption		2Watts [max]			
Operation temperature		0~40°C [32~104°F]			
Storage temperature		-20~60°C [-4~140°F]			
Relative humidity		20~90% RH [no condensation]			



5. Connection Diagram

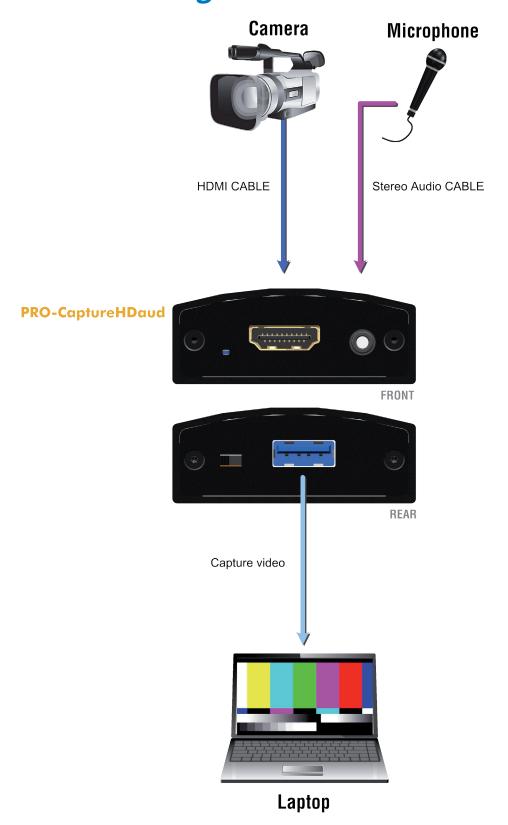



6. Panel Description



- 1. AUDIO SWITCH: [left] Audio from stereo audio in, [right] Audio from HDMI
- 2. USB OUT: Connect to a USB host (PC, NB, MAC...) and Firmware update
- 3. LED Indicator: Input signal indicator LED
- 4. HDMI IN: Connect to a HDMI source
- 5. STEREO AUDIO IN: connect to analog stereo audio source



7. USB Pin Definition



	P1		P2
VBUS	1	←	1
D-	2	←	2
D+	3	←	3
GND	4	←	4
StdA_SSRX-	5	←	5
StdA_SSRX+	6	←	6
GND	7	←	7
StdA_SSTX-	8	←	8
StdA_SSRX+	9	←	9
Shield	SHELL	←	SHELL



8. Limited Warranty

The SELLER warrants the **PRO-CaptureHDaud USB 3.0 Full HD Video Capture Device with Audio** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the PRO-CaptureHDaud features and specifications is subject to change without further notice.





Disclaimer

The product name and brand name may be registered trademarks of related manufacturers. TM and ® may be omitted on the user's guide. The pictures on the user's guide are just for reference, and there may be some slight differences with the actual products.

We reserve the rights to make changes without prior notice to a product or system described herein to improve reliability, function, or design.

